


Karlslund SuperFit user guide

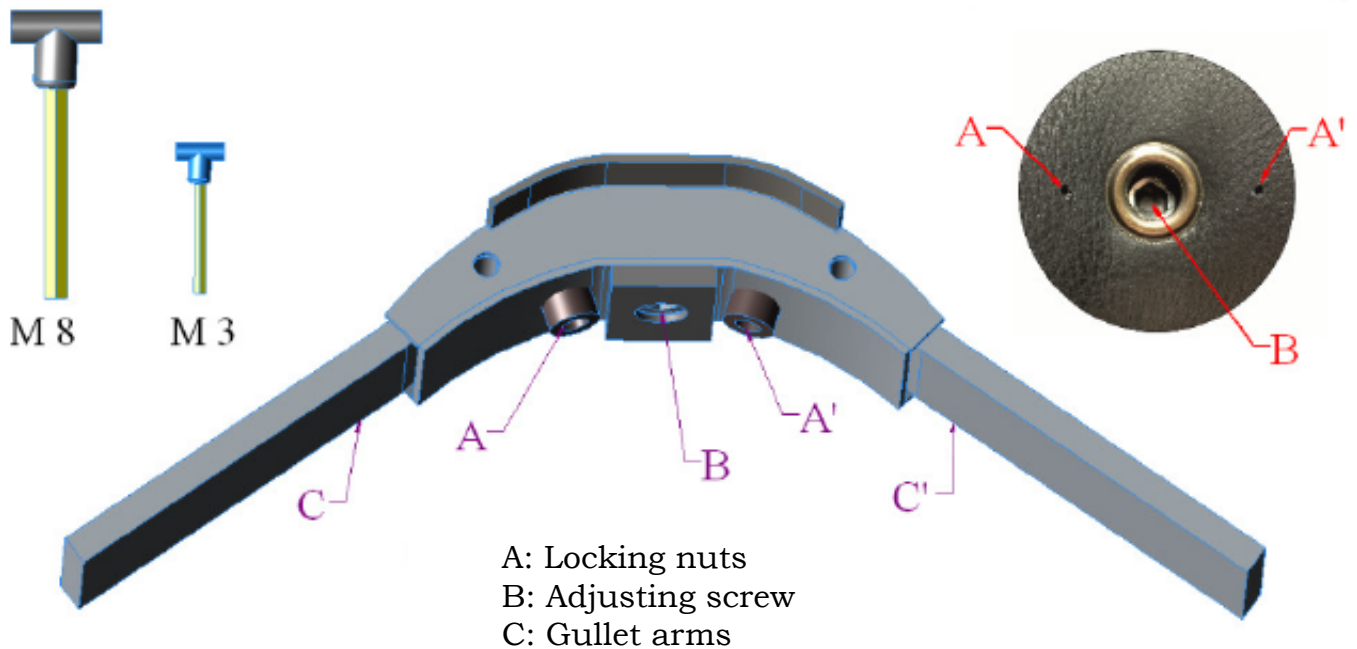

- 1) First unlock the nuts by turning each of them counterclockwise two full turns with the M3 key.
- 2) Then adjust the arms to the required angle using the M8 key in the middle, where turning clockwise makes the saddle wider, and counterclockwise more narrow. One full turn of the adjusting nut corresponds to 5°.
- 3) After adjusting the angle always remember to tighten the two locking nuts again with the M3 key.

Minimum angle: 81°
Maximum angle: 96°

Warning: Locking nuts must always be loosened before adjusting the angle and tightened afterwards in order to prevent malfunctioning of the device.

